




- / equipped with a authorised **3M** self-adhesive backing tape
- / suitable for sound insulation
- / suitable for fire/smoke protection


ADHESIVE FIRE/SMOKE GASKETING




DIMENSIONS

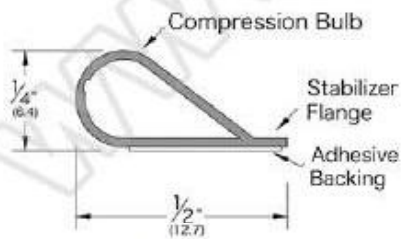

S88



S44

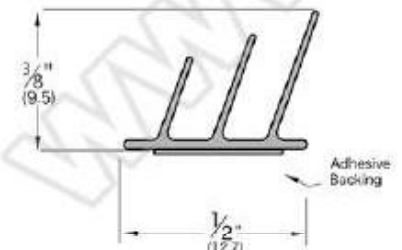

S773




TECHNICAL DATA

Application	Wood and Metal Door
Material	Silicone, 3M self-adhesive tape
Working Temperature	-40°C to +200°C
Available Lengths	17', 21', 25', 204', 510' and Custom
Certificates	UL-10B/10C ; CAN/ULC-S104
Available Color and MOQ	<ul style="list-style-type: none"> BL - Black ; 3000 METERS W - White ; 3000 METERS D - Dark Brown ; 5000 METERS C - Clear ; 5000 METERS GR - Gray ; 5000 METERS TAN - TAN ; 10000 METERS

NOTE

You can get more information by checking the CCN#R39848 about UL Certificate. 3M authorization information is also verifiable.

INSTALLATION GUIDE

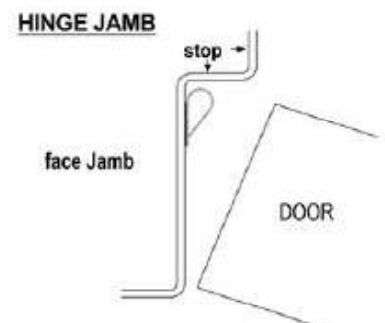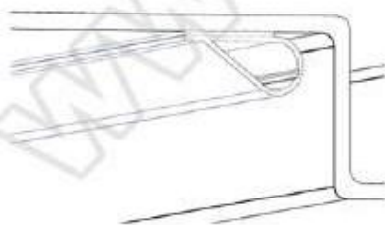

UL FIRE ENDURANCE TEST C



Fire Resistance Test

The hinged fire door faces the flame from a flame eject furnace with a temperature of 1100°C(2012°F), burning for 3 hours, the flame couldn't burst out of the fireproof door.

Hose Stream Test

After 3 hours fire resistance test, use of diameter 64.5 mm / 310 kpa water pressure spray gun to spray the fire door with S-shape immediately, for at least 10 minutes. The fire door will not fall after the above test.



Durability Cycle Test

YOTI Adhesive Fire/Smoke Gasketing surpasses 2,500,000 cycles at Testing laboratory. After so many compressions, the product can still bounce back to original.

Door Weight: 300Lbs(136KG)


Product Life Time

After our Adhesive Fire/Smoke Gasketing were sold to the United States, they have been used for 6 years on a door in a plaza in Minneapolis without any signs of come off.



PACKAGING INFORMATION

The 17', 21' and 25' will be individually packed in a poly bag with their corresponding **INSTALLATION INSTRUCTIONS**, along with a **FRAME CLEANER**, as can be seen in the photos, and a **FIRE LABEL** sticker.

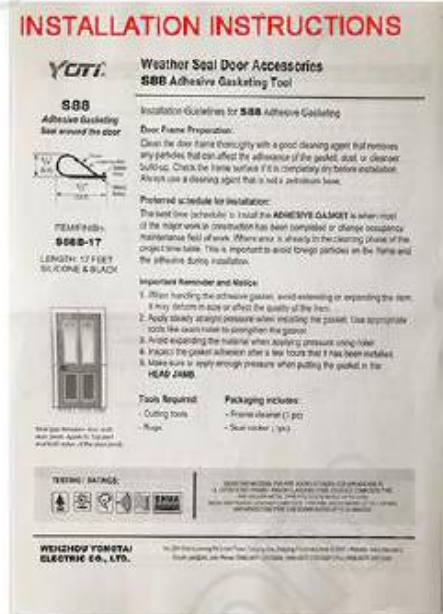

17',21',25' : 1PC



17',21',25' : 1PC

The 204' and 510' will be rolled in a roller and packed in an individual poly bag with their corresponding **INSTALLATION INSTRUCTIONS**, along with a **FRAME CLEANER**, and a **FIRE LABEL** sticker.



204' : 12PCS
510' : 30PCS



204' : 12PCS
510' : 30PCS